Data Sheet

Receiver 1985



Description

Miniature magnetic receiver (balanced armature type) for use in hearing aids with push-pull output stage.

Features


- Great BTE/ITE applications
- High output, maximum peak output 138 dB
- Low distortion



Weight 0.69 gr. Case material Ni80Fe20

Solder pad material Sn96.5Ag3.0Cu0.5
Dimensions Refer to outline drawing

Product drawing - Dimensions in mm [inch]

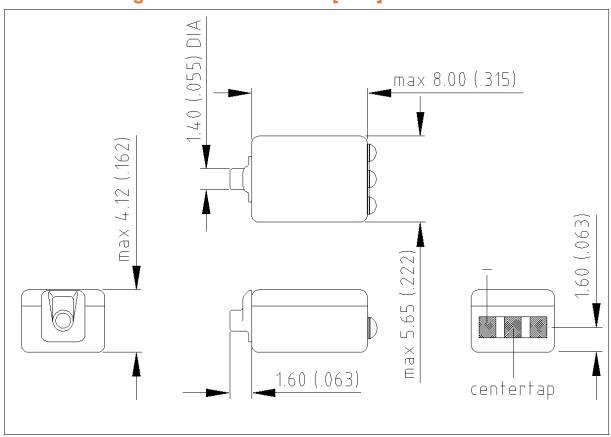

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

DK: +45 4630 6666 USA: +1 952 543 8300 PRC: +86 512 6832 3401 NL: +31 20 6068 100



Data Sheet

Receiver 1985



Specifications

The acoustic termination consists of: 8 mm x 1 mm ID + 28 mm x 1.5 mm ID + 25 mm x 2 mm ID + 18 mm x 3 mm ID + 2 cc coupler. The electrical input is a 1.51 mA RMS constant current signal from a high impedance source, applied to the total winding. Environmental conditions: $23 \, ^{\circ}\text{C}$ (73.4F), $50 \, ^{\circ}\text{C}$ RH.

| · . | | | | | | |
|---------------------------------|------------|-------|-------|-------|------|----------|
| Acoustic parameters | | Min | Тур | Max | Unit | Comments |
| Sensitivity | @ 200 Hz | 105.5 | 108 | 110.5 | dB | |
| | @ 700 Hz | 114 | 116 | 118 | dB | |
| Peak 1 | frequency | 880 | 1030 | 1180 | Hz | |
| | output | 124.3 | 126.3 | 128.3 | dB | |
| Valley 1 | frequency | 1200 | 1400 | 1600 | Hz | |
| | output | 116 | 118 | | dB | |
| Peak 2 | frequency | 1780 | 1930 | 2080 | Hz | |
| | output | 123.6 | 125.6 | 127.6 | dB | |
| Valley 2 | frequency | 2100 | 2400 | 2700 | Hz | |
| | output | 116 | 118 | | dB | |
| Peak 3 | frequency | 2650 | 2800 | 2950 | Hz | |
| | output | 119.6 | 121.6 | 123.6 | dB | |
| Valley 3 | frequency | 3300 | 3600 | 3900 | Hz | |
| | output | 105 | 107 | | dB | |
| Peak 4 | frequency | 3990 | 4140 | 4290 | Hz | |
| | output | 111 | 113 | 115 | dB | |
| Valley 4 | frequency | 4700 | 5000 | 5300 | Hz | |
| | output | 94 | 98 | | dB | |
| Peak 5 | frequency | 5220 | 5520 | 5820 | Hz | |
| | output | 100.9 | 104.9 | 108.9 | dB | |
| THD | @ 1/3 peak | | | 9 | % | |
| | @ 1/2 peak | | | 9 | % | |
| Maximum output @ peak frequency | | 135 | 138 | 141 | dB | |

| Electric parameters | Min | Тур | Max | Unit | Comments |
|----------------------|-----|-----|-----|------|----------|
| Impedance @ 1000 Hz | 352 | 440 | 528 | Ohm | |
| Impedance @ 500 Hz | 182 | 228 | 273 | Ohm | |
| DC resistance @ 20°C | 59 | 70 | 81 | Ohm | |

| Additional parameters | Min | Тур | Max | Unit | Comments |
|---------------------------|------|-----|-----|------|---|
| Shock resistance | 5500 | | | g | 90% survival rate with THD @ 1/2 peak frequency < 10% |
| Storage temperature range | -40 | | 63 | °C | |

A positive voltage applied to the negative terminal (-) will result in an increase in pressure at the sound outlet.

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

DK: +45 4630 6666 USA: +1 952 543 8300 PRC: +86 512 6832 3401 NL: +31 20 6068 100




Data Sheet

Receiver 1985





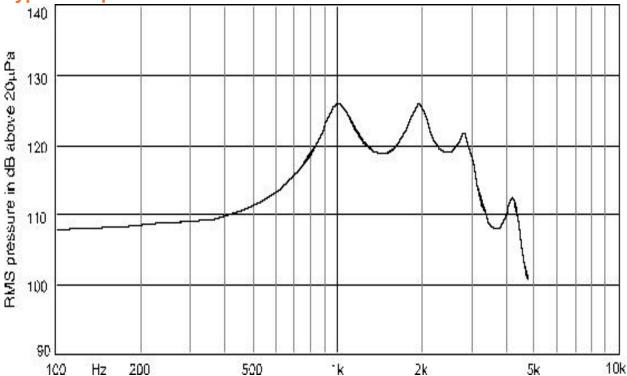

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

Version date