


Description

Inductive pick-up coil for use in hearing instruments.

Features

- Highly durable coating
- Small size
- High sensitivity



Electrical data


Measuring conditions: Temperature 23°C (73.4F) ± 5°C (64.4F-82.4F)

Parameters	Min	Typ	Max	Unit	Comments
DC resistance	1125	1250	1375	Ohm	
Inductance @ 1 kHz	89	105	121	mH	
O.C. 1 kHz sensitivity	-65.8	-64.3	-62.8	dBV/A/m	
10 kOhm load 1 kHz sensitivity	-66.9	-65.4	-63.9	dBV/A/m	
Resonance frequency	150			kHz	
Winding sense	North positive				

Lead wires

Start lead description: Green, 51mm, #34 AWG (Ø 0.160mm), solid Cu with PU coating, 0.7mm Ag plated
Finish lead description: Red, 51mm, #34 AWG (Ø 0.160mm), solid Cu with PU coating, 0.7mm Ag plated
Lead wire length measured from solder pad

Product drawing - Dimensions in mm [inch]

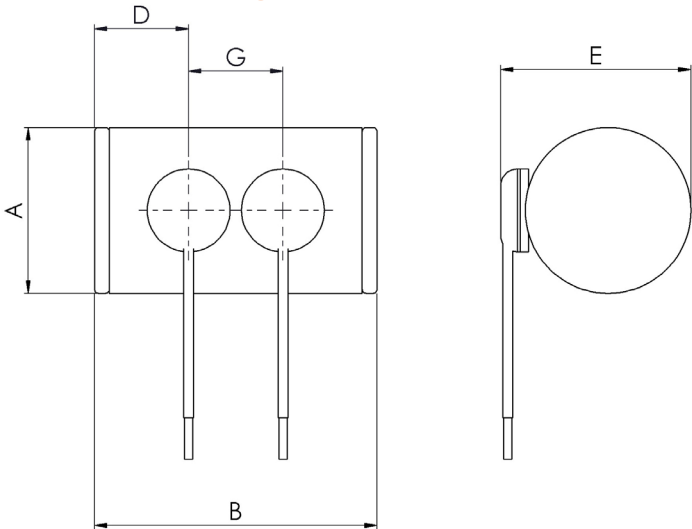

Mechanical data

Dimensions	in mm	in inch
Dimension A max.	2.11	0.083
Dimension B max.	3.61	0.142
Dimension D max.	1.25	0.049
Dimension E max.	2.45	0.096
Dimension G max.	1.75	0.069

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.